



Metallics

SNAPSKRU®

Self-Drilling Drywall Anchors




The Strongest, easiest-to-use self-drilling drywall anchor—

INSTALLATION INSTRUCTIONS: Tools Needed

Screw gun with #2 Phillips bit (or #2 Phillips screwdriver, or electric drill with clutch mechanism & #2 bit)




Press tip of SnapSkru anchor into drywall using #2 Phillips screwdriver or screw gun. Drive anchor clockwise into drywall until anchor stops flush with the outer wall surface. *TIP: To keep anchor in precise position during installation (critical for aligning several anchors), push tip of screwdriver into drywall to mark insertion point.*

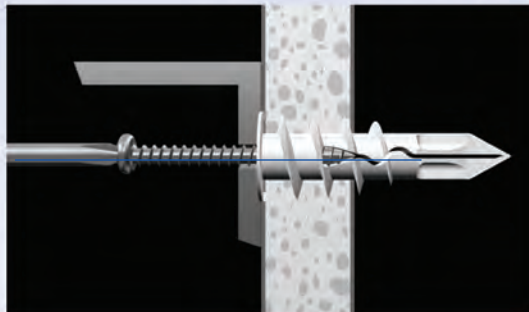

Screw for *MINI* anchor:
#6 through #8 (#6 preferred).
[3.5-4.5mm, 4mm preferred]

Screw for *Regular* anchor:
#6 through #10 (#8 preferred).
[3.5-4.5mm, 4mm preferred]

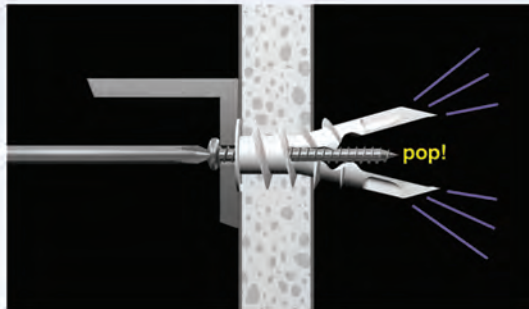

Tighten screw flush with item.

The screw pops open the anchor, locking it on the wall and holding the gypsum board in compression. This reinforces the wall, increasing its holding power significantly.

Screw Length = Thickness of item being installed plus 1-1/4".

Another NEW exciting solution from Metallics! Tired of searching for the right Anchor Here it is!

Toggler SnapSkru®...

Stock Number	UPC#	Description	Quantity Per Pkg.	Suggested Trade List Per Pkg.
ASPM	73921	Toggler SnapSkru Mini	50	\$23.93
ASP	73920	Toggler SnapSkru Regular	50	\$30.95

Metallics

229 Cross Street,
Bristol, Ct. 06010
Tel: 800-243-8272
Fax: 800-831-9358
Email: sales@metallicsonline.com

"Growth Through Innovation"

www.metallicsonline.com

Metallics West

651 North Main Street
Mancos, Co. 81328
Tel: 800-269-5183
Fax: 800-269-6278
Email: saleswest@metallicsonline.com