



Metallics

TOGGLER®

Hollow Wall Anchors



TOGGLER Hollow-Wall Anchors give you super versatility in:


- Gypsum Board
- Plasterboard
- Acoustic Ceilings
- Thin Paneling
- Hollow Core Doors
- Drywall
- Plaster
- Mastonite
- Sheet Metal
- Fiberglass

Another NEW exciting solution from Metallics!

Tired of searching for the right Hollow Wall Anchor...

Here it is!

Toggler®

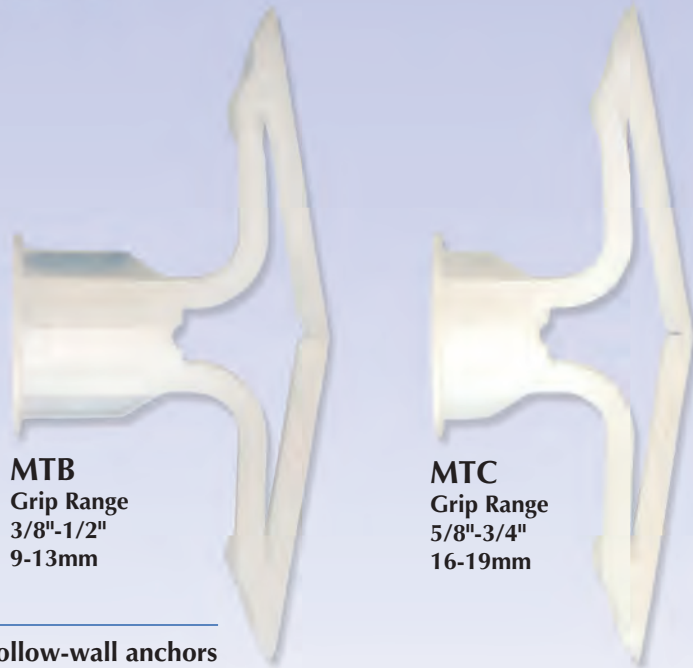


MTB
Grip Range
3/8"-1/2"
9-13mm

MTC
Grip Range
5/8"-3/4"
16-19mm

All TOGGLER hollow-wall anchors install in a small 5/16" (8mm) diameter hole. With reasonable care, you can even use your screwdriver to make the hole in drywall.


Installs quickly and securely




Drill 5/16" (8mm) hole.
Fold anchor in middle.



Insert anchor in hole
and tap flush with wall.



Insert key to pop anchor
open behind hollow wall
(not necessary for thick or
solid walls) Do not force
or hammer key.



Place item over anchor
and tighten until screw
is flush with fixture.
Then, stop.

Stock Number	UPC#	Description	Quantity Per Pkg.	Suggested Trade List Per Pkg.
MTB	73962	Toggler 3/8"-1/2" hollow wall anchor	50	\$21.98
MTC	73963	Toggler 3/8"-3/4" hollow wall anchor	50	\$25.30

Metallics

229 Cross Street,
Bristol, Ct. 06010
Tel: 800-243-8272
Fax: 800-831-9358
Email: sales@metallicsonline.com

"Growth Through Innovation"

www.metallicsonline.com

Metallics West

651 North Main Street
Mancos, Co. 81328
Tel: 800-269-5183
Fax: 800-269-6278
Email: saleswest@metallicsonline.com